

Fiber Optic Pigtaills


LL-PGT-FC-sm

— Pigtail FC, 9/125 —

Connector : metal body, ceramic ferrule (ZrO₂)
Fiber : 900µm singlemode 9/125, yellow

STANDARD COMPLIANCE

All components of / and the final product are designed and tested to confirm the requirements of IEC 60874-07, CECC, Bellcore / Telcordia GR-326 (reduced), EIA/TIA 568, ISO/IEC 11801:2002 2nd Ed., EN 50173-1:2002, ITU-T G.652.D, IEC 60793-2-50 B1.3, IEC 60793-2-10. All components are RoHS compliant and do not and will not contain any restricted hazardous substances as detailed in RoHS 2002/95/EC.

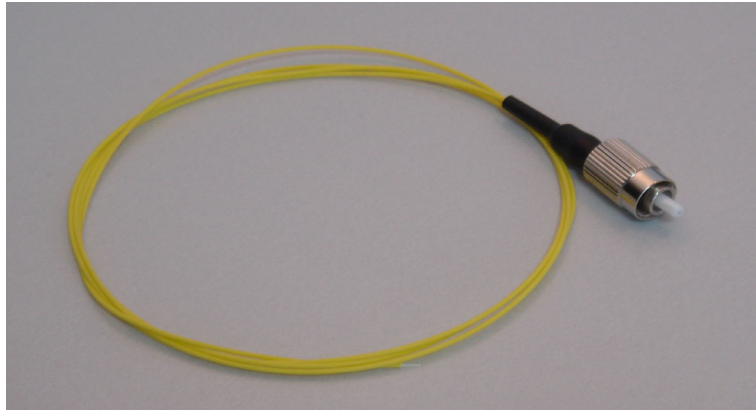



PERFORMANCE

Attenuation	: <0,25 dB
Return loss	: >35 dB
Temperature range	: -10° C to +65° C
Color of fiber	: yellow other colors on request
Fiber version	: semi-tight buffer; tight buffered on request
Color of boot	: black; other colors on request
Packaging	: 6 pcs./unit other packaging on request



TECHNICAL SPECIFICATION

Type	: FC
Material of ferrule	: ZrO ₂ (Zirconia/Ceramic)
Material of body	: full metal body
Connection at adapter	: screwing device
Insertion loss	: <0,10 dB
Attenuation after termination	: <0,25 dB
Mating cycles	: >1000
Ferrule drilling	: 125 / 126 µm

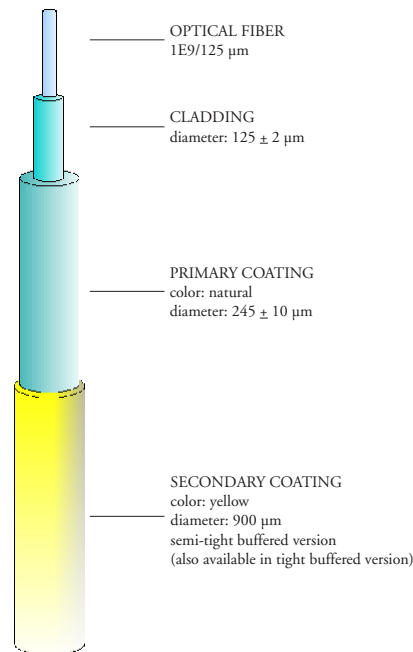

MECHANICAL PERFORMANCE FIBER

Weight	: 0,7 kg/km
Temperature range	: -10° C to +65° C
Bending radius	: 30 mm
Tensile strength	: 3 N
Crush resistance	: 0,1 N/mm (long term) - 1 N (short term)

OPTICAL PERFORMANCE FIBER

Item		9/125
CORE DIAMETER	µm	9,2± 0,4
CLADDING DIAMETER	µm	125 ± 1
CLADDING NON-CIRCULARITY	%	≤1,0
CORE/CLADDING CONCENTRICITY	µm	≤ 0,6
TYP. ATTENUATION @ 1310nm - 1625nm	dB/km	0,39
TYP. ATTENUATION @ 1550nm	dB/km	0,25
CHROM. DISP. COEF. 1285nm - 1330nm	ps/km*nm	≤ 3
CHROM. DISP. COEF. 1270nm - 1340nm	ps/km*nm	≤ 6
CHROM. DISP. COEF. 1550nm	ps/km*nm	≤ 18
CUT-OFF WAVELENGTH HIGH/LOW LIMIT	λ _c nm	1330/1150
POLARISATION MODE DISP. (PMD) COEF.	ps/√km	≤ 0,5
PMD ₀ LINK DESIGN VALUE	ps/√km	≤ 0,2
FOR ENTIRE FIBER SPECS REFER TO		LL-F-002-SMC

— On request, fibers featuring other than the above stated specifications can be quoted —

